


- Wide 2:1 input voltage
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- 2 × MOPP Medical safety according to AAMI/ANSI ES 60601-1:2005(R) and IEC/EN 60601-1 3rd edition
- Low leakage current
- High efficiency up to 82%
- Extended operating temperature range
- 3-year product warranty



The TIM 2 series is a range of high performance, regulated 2 Watt DC/DC converters in a DIP-16 plastic package. The reinforced I/O-isolation system complies with the medical safety requirements for 2 × MOPP (Means Of Patient Protection). The converters constitute also a reliable solution for many demanding applications such as transportation systems, industrial control equipments, measurement equipments, and some IGBT driver applications.

Models				
Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TIM 2-0910	4.5 – 12 VDC (9 VDC nominal)	3.3 VDC	500 mA	74 %
TIM 2-0911		5.0 VDC	400 mA	78 %
TIM 2-0919		9.0 VDC	222 mA	79 %
TIM 2-0912		12 VDC	167 mA	81 %
TIM 2-0913		15 VDC	134 mA	81 %
TIM 2-0915		24 VDC	83 mA	81 %
TIM 2-0922		±12 VDC	±83 mA	81 %
TIM 2-0923		±15 VDC	±67 mA	81 %
TIM 2-1210	9.0 – 18 VDC (12 VDC nominal)	3.3 VDC	500 mA	75 %
TIM 2-1211		5.0 VDC	400 mA	78 %
TIM 2-1219		9.0 VDC	222 mA	78 %
TIM 2-1212		12 VDC	167 mA	81 %
TIM 2-1213		15 VDC	134 mA	81 %
TIM 2-1215		24 VDC	83 mA	81 %
TIM 2-1222		±12 VDC	±83 mA	81 %
TIM 2-1223		±15 VDC	±67 mA	82 %
TIM 2-2410	18 – 36 VDC (24 VDC nominal)	3.3 VDC	500 mA	75 %
TIM 2-2411		5.0 VDC	400 mA	78 %
TIM 2-2419		9.0 VDC	222 mA	78 %
TIM 2-2412		12 VDC	167 mA	80 %
TIM 2-2413		15 VDC	134 mA	81 %
TIM 2-2415		24 VDC	83 mA	81 %
TIM 2-2422		±12 VDC	±83 mA	81 %
TIM 2-2423		±15 VDC	±67 mA	82 %
TIM 2-4810	36 – 75 VDC (48 VDC nominal)	3.3 VDC	500 mA	75 %
TIM 2-4811		5.0 VDC	400 mA	77 %
TIM 2-4819		9.0 VDC	222 mA	78 %
TIM 2-4812		12 VDC	167 mA	80 %
TIM 2-4813		15 VDC	134 mA	81 %
TIM 2-4815		24 VDC	83 mA	81 %
TIM 2-4822		±12 VDC	±83 mA	81 %
TIM 2-4823		±15 VDC	±67 mA	81 %

Input Specifications

Input current no load		9 Vin models: 90 mA typ. 12 Vin models: 45 mA typ. 24 Vin models: 25 mA typ. 48 Vin models: 12 mA typ.
Surge voltage (1 s max.)		9 Vin models: 15 V max. 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.
Start-up voltage		9 Vin models: 4.5 VDC (or lower) 12 Vin models: 9.0 VDC (or lower) 24 Vin models: 18 VDC (or lower) 48 Vin models: 36 VDC (or lower)
Startup time		10 ms typ. / 20 ms max.
Under voltage shut down		9 Vin models: 2 - 4 VDC 12 Vin models: 6 - 8 VDC 24 Vin models: 13 - 17 VDC 48 Vin models: 29 - 35 VDC
Input filter		capacitor type
Conducted noise	– Conducted & Radiated input suppression	EN 55011 limits to IEC/EN 60601-1-2 4th edit. EN 55032 class A or B with external components www.tracopower.com/overview/tim2
	– Application note for filter class A/B proposal	
EMC immunity	– Generic for Medical equipment	IEC/EN 60601-1-2 4th edition EN 61000-4-2, air ± 15 kV, contact ± 8 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria A EN 61000-4-5, ± 1 kV perf. criteria A 9 Vin models: Nippon chemi-con KY 1000 μ F / 25 V TVS - SMAJ18A, 18 V, 400 W 12 & 24 Vin models: Nippon chemi-con KY 470 μ F / 50 V 48 Vin models: Nippon chemi-con KY 220 μ F / 100 V EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A
	– ESD (electrostatic discharge)	
	– Radiated immunity	
	– Fast transient / surge (with external input capacitor / diode)	
	– Conducted immunity	
	– Magnetic field immunity	
External input fuse required		9 Vin models: 1.0 A (slow blow) 12 Vin models: 0.5 A (slow blow) 24 Vin models: 0.315 A (slow blow) 48 Vin models: 0.16 A (slow blow)

Output Specifications

Voltage set accuracy		±1 % max.
Regulation	– Input variation (Vin min. to Vin max.)	0.2 % max.
	– Load variation (0 – 100 %)	1 % max.
	– Load variation (10 – 90 %)	single output: 0.5 % max. dual output: 0.8 % max.
	– Cross regulation	dual output: 5.0 % max. (asymmetrical load 25 / 100%)
Minimum load		not required
Ripple and noise (20 MHz Bandwidth)		50 mVp-p typ.
Transient response (25% load step change)		500 µs typ.
– Recovery time		
Short circuit protection		Continuous, automatic recovery

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Overvoltage protection		3.3 Vout models:	4 - 6.5 VDC
		5.0 Vout models:	6 - 8 VDC
		9.0 Vout models:	10 - 14 VDC
		12 Vout models:	13 - 19 VDC
		15 Vout models:	16 - 22 VDC
		24 Vout models:	25 - 35 VDC
Capacitive load	– Single output	3.3 & 5.0 Vout models:	1'000 µF max.
		9.0 Vout models:	430 µF max.
		12 Vout models:	220 µF max.
		15 Vout models:	170 µF max.
		24 Vout models:	100 µF max.
	– Dual output	±12 Vout models:	170 µF max. (each output)
		±15 Vout models:	100 µF max. (each output)
Temperature ranges	– Operating (natural convection: 20 LFM, 0.1 m/s)	–40°C to +95°C	
	– Case temperature	+105°C max.	
	– Storage temperature	–55°C to +125°C	
Derating		6.7 %/K above 90°C	
Humidity (non condensing)		5 % to 95 % rel H max.	
Isolation voltage (50 Hz, 60 s)		5000 VAC (reinforced insulation)	
Working voltage		250 VAC, 2 × MOPP	
Isolation capacitance		20 pF max.	
Clearance/creepage		8 mm min.	
Leakage current (at 240 VAC, 60 Hz)		2 µA max.	
Altitude during operation		5000 m max.	
Temperature coefficient		±0.02 %/K max.	
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		6'809'000 h	
Switching frequency		100 kHz min. (frequency modulated)	
Shock, vibration and thermal shock resistance		according to MIL-STD-810F	
Remote On/Off	– On:	open circuit or high impedance	
	– Off:	2 – 4 mA current applied via 1kOhm resistor	
	– Off idle current:	2.5 mA typ.	
Safety standards/approvals	– Medical equipment	ANSI/AAMI ES60601-1:2005/(R)2012, IEC/EN60601-1 3rd edition	
	– Certification documents	www.tracopower.com/overview/tim2	
Environmental compliance	– Reach	www.tracopower.com/products/reach-declaration.pdf	
	– RoHS	RoHS directive 2011/65/EU	

Physical Specifications

Casing material	non-conductive black plastic
Base material	non-conductive black plastic
Potting material	silicone (UL94 V-0)
Package weight	7.0 g (0.24 oz)
Soldering temperature	260°C / 10 s max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

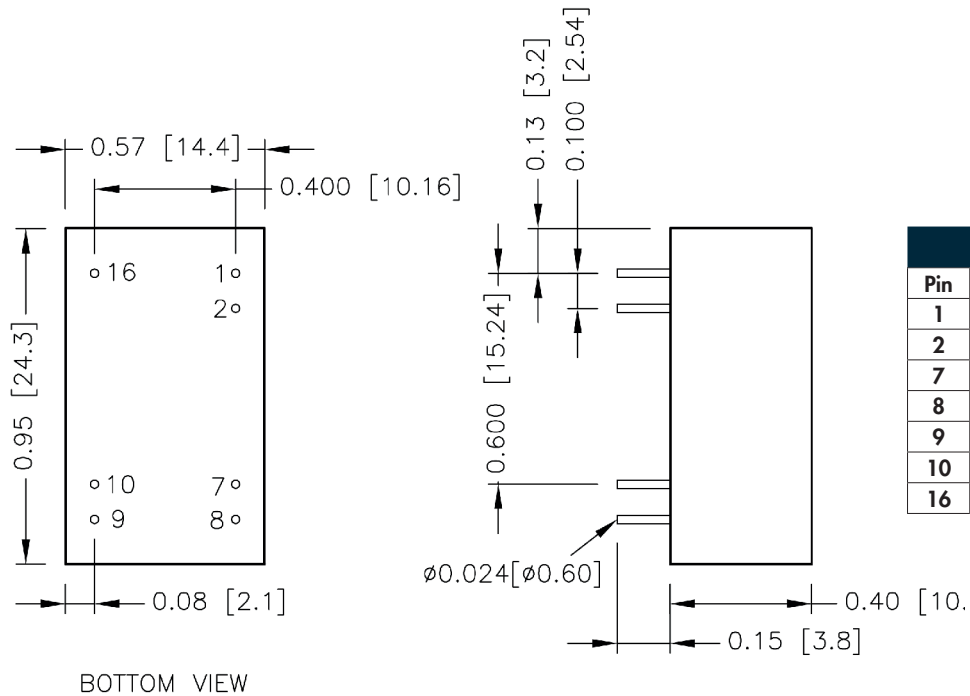

Standard Pinout		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	On/Off	On/Off
7	NC	NC
8	NC	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin (Vcc)	+Vin (Vcc)

Dimensions in Inch [mm]
 Tolerances ± 0.02 [± 0.5]
 Pin $\varnothing 0.024 \pm 0.004$ [0.6 ± 0.1]
 Pin pitch tolerances ± 0.01 [± 0.25]