

A4-4Z-C2-X

Relay Socket




Features

Ambient temperature :	-25 °C ~ 55°C
Rated Ae:	250VAC
Rated Current :	6A
Input voltage:	6 ~ 110VDC
Dielectric strength :	Between coil & contacts 4000VAC
Terminal torque:	1.0Nm
Wire strip length :	7mm
Max wire size :	mm ² 2x1.5 AWG 2x16
Applicable relay type :	HFA4

ORDERING INFORMATION

	A4	-4Z	-C2	-X
Type				
Contact arrangement	4Z: 4 Pole			
Termination & mounting			C2: Screw Terminal, DIN rail mounting, With finger protection device	
Voltage of module			D24: Realy's applicable rated voltage: 6, 9, 12,18, 24 VDC D60: Realy's applicable rated voltage: 36, 48, 60 VDC D110: Realy's applicable rated voltage: 85,110 VDC Nil: Without LED	

OUTLINE DIMENSIONS, WIRING DIAGRAM, PC BOARD LAYOUT AND CIRCUIT DIAGRAM Unit: mm

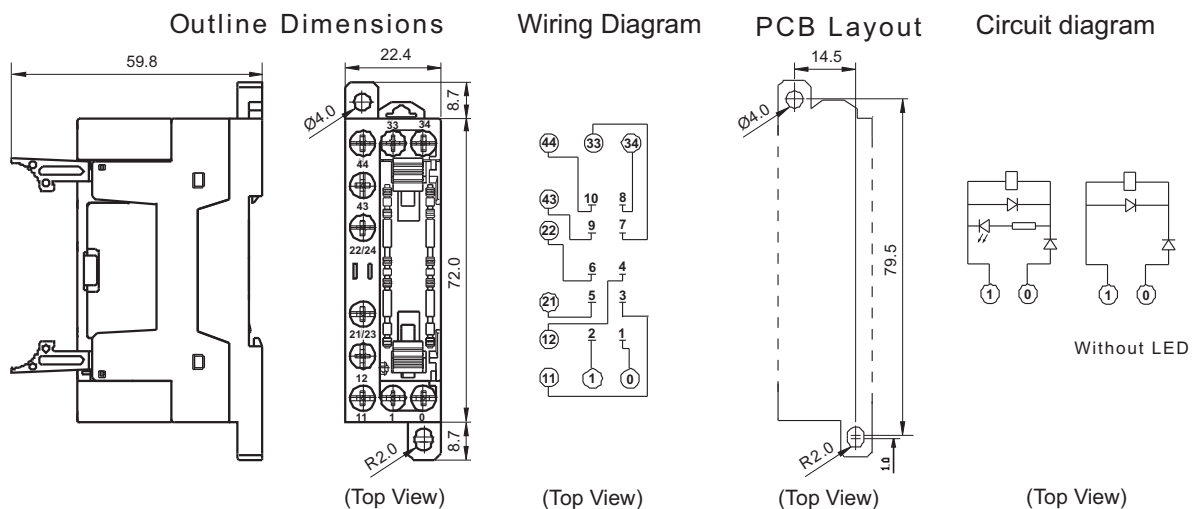

Notes: Main outline dimension(L, W, H) ≥50mm, tolerance should be ±1mm; outline dimension >20mm and <50mm, tolerance should be ±0.5mm; outline dimension ≤20mm, tolerance should be ±0.3mm.

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.